


P9 Family : The second bar must be able to be placed completely into the coupler prior to tightening.
P8 Coupler Family: The P8 has more adjustment than the P9 and can close a gap equivalent to dimension "M" in the table.

1. Rotate the female end of the coupler onto the first reinforcing bar and tighten according to the settings in the instruction sheet (PDF051).

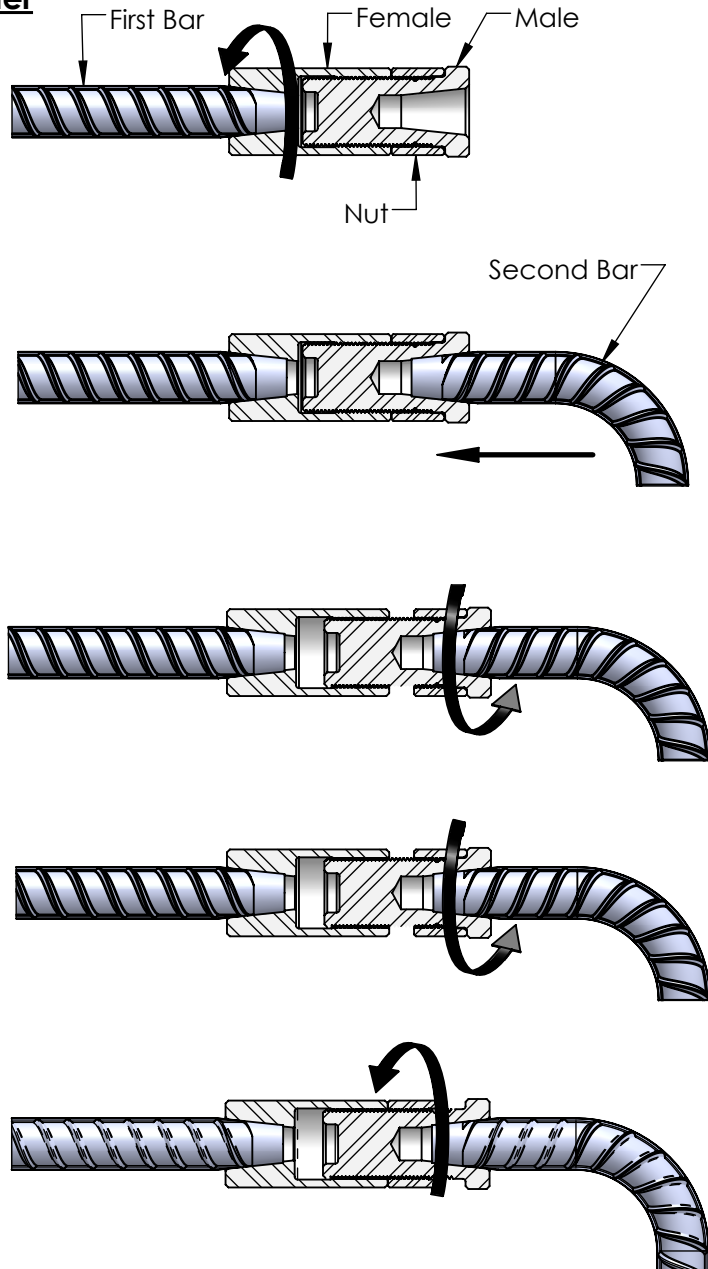

 Ensure that the groove in the thread of the male part can not be seen.
Refer to PDF051.

WARNING:

1. nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at www.nVent.com and from your nVent customer service representative.
2. nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.


SAFETY INSTRUCTIONS:
All governing codes and regulations and those required by the job site must be observed.
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

TECHNICAL SUPPORT:
www.nVent.com



CRSELP B



1. Rotate the female end of the coupler onto the first reinforcing bar and tighten according to the settings in the instruction sheet (PDF051).

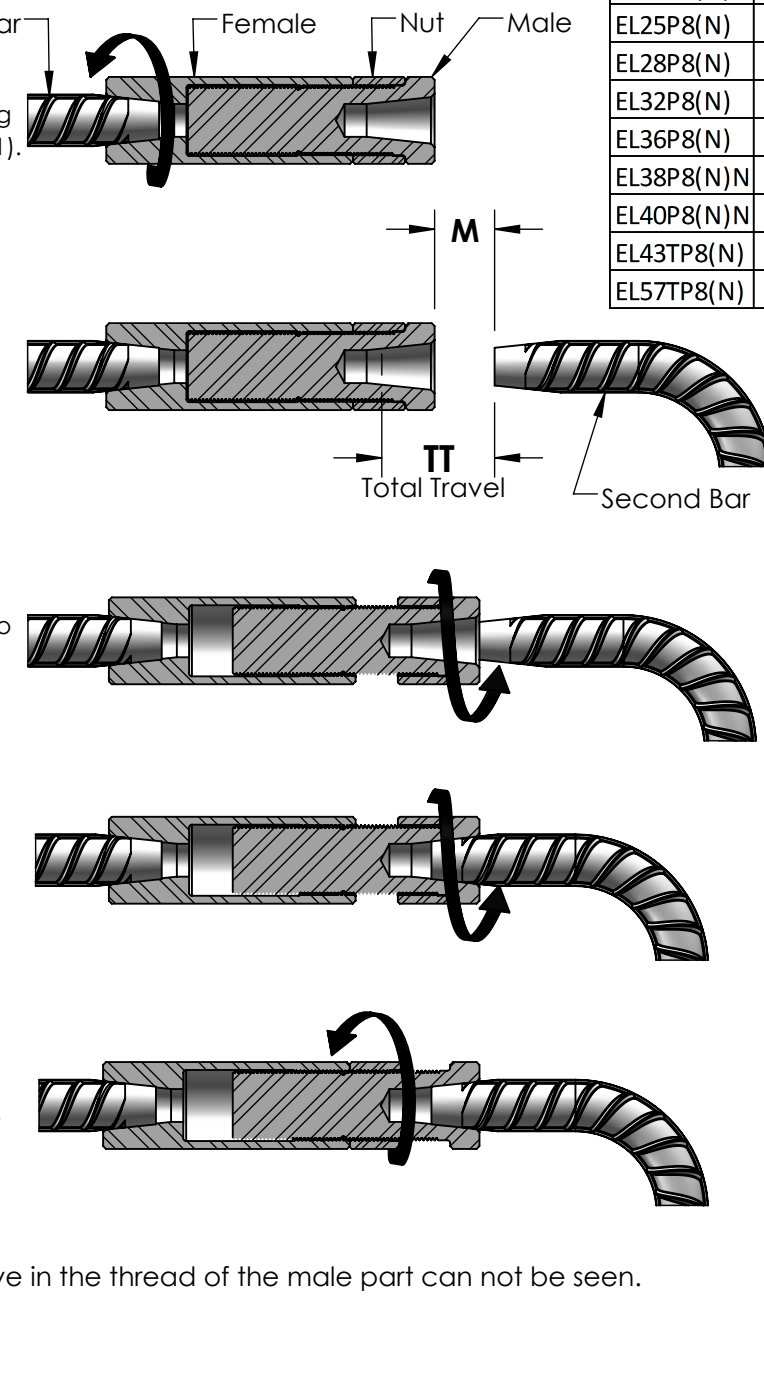

 Ensure that the groove in the thread of the male part can not be seen.
Refer to PDF051.

Coupler Size	Bar Size		M		TT	
	US	Metric	Inch	[mm]	Inch	[mm]
EL16P8(N)	#5	16	0.72	[18]	1.58	[40]
EL20P8(N)	#6	20	0.89	[23]	1.98	[50]
EL22P8(N)	#7	22	0.89	[23]	2.15	[55]
EL25P8(N)	#8	25	0.88	[22]	2.24	[57]
EL28P8(N)	#9	28	0.89	[23]	2.38	[60]
EL32P8(N)	#10	32	0.89	[23]	2.47	[63]
EL36P8(N)	#11	36	0.89	[23]	2.57	[65]
EL38P8(N)N	-	38	0.44	[11]	2.61	[66]
EL40P8(N)N	-	40	1.14	[29]	3.31	[84]
EL43TP8(N)	#14	43	1.50	[38]	3.70	[94]
EL57TP8(N)	#18	57	1.50	[38]	4.31	[109]

Dimensions are Nominal

B	REBRANDING	1014907	02MAR18	JLC	MNB	ADM	—	—
REV	DESCRIPTION	EN #	DATE	DRN	CHK	APP	QA	MFG
<div>Tolerance (Inch) Unless Noted</div> <div>Angular Tolerance: ±N/A °</div> <div>Fractional Tolerance: ±N/A</div> <div>Two Place Decimal: ±N/A</div> <div>Three Place Decimal: ±N/A</div>		<div></div> <div>Third Angle Projection</div> <div></div>						
						<div>Title: INSTALLATION</div> <div>COMPARISON</div> <div>P8 AND P9 POSITION COUPLERS</div>		
<div>Tolerance [mm] Unless Noted</div> <div>Angular Tolerance: ±N/A °</div> <div>One Place Decimal: ±N/A</div> <div>Two Place Decimal: ±N/A</div>		Scale None	DWG	CRSELP	REV B			
						B Size SHT 1 Of 1		

© 2016-2018 nVent All Rights Reserved