

SBLL-250 LUG-TO-LUG POWER TERMINAL



CERTIFICATIONS



DESIGN

Tinned copper block allows for copper or aluminum conductor connections

Accessible studs allow for easy connection of sections of nVent ERIFLEX Flexibar or other conductors

Design allows for visual inspection of conductor and confirmation of connection

Adjustable transparent cover

Modular snap-together blocks for building multi-pole power blocks

Easily clips onto DIN rail or mounts to panel with screws

SBLEC Power Terminals Fixing Accessory required for direct panel mount

RoHS compliant

Halogen free

SPECIFIKATIONER

Table 1/5						
Katalognummer	Article Number	Finish	Max Current Rating, IEC	Max Current Rating, UL/CSA	Högsta statiska kortslutningssström (SCCR)	Peak Short Circuit Current (I _{pk})
SBLL-250	561132	Tinned	290A	255A	100kA	42kA

Table 2/5						
Katalognummer	Article Number	Material	Number of Stud Connections	Stud Connection Conductor Width	Short Term Withstand Current (I _{cw}) 1s	Stud Connection Wire Size
SBLL-250	561132	Copper, Thermoplastic	2	20 – 24 mm	14.4kA	#8 - 250 kcmil

Table 3/5						
Katalognummer	Article Number	Stud Connection Compact Stranded Wire Size	Max Working Voltage, IEC (Ui)	Max Working Voltage, UL (Vin)	Höjd (H)	Bredd (W)
SBLL-250	561132	10 – 120 mm²	1000, 1500	1000	205.7mm	52.3mm

Table 4/5						
Katalognummer	Article Number	Djup (D)	A	Enhetsvikt	Flammability Rating	Certification Details
SBLL-250	561132	65mm	108mm	0.16kg	UL® 94V-1	UL® 1059


Table 5/5		
Katalognummer	Article Number	Uppfyller kraven enligt
SBLL-250	561132	IEC® 60947-7-1

ADDITIONAL PRODUCT DETAILS

Power terminal connections are interchangeable and can be used as line side or load side connections.

Design Guideline for Distribution Blocks, Power Blocks and Power Terminals										
Derating according to Ambient* Temperature (°C) to maintain working temperature of 85°C										
Ambient Temperature (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
Derating Coefficient (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*environment around the terminal blocks inside the enclosure										

DIAGRAMS

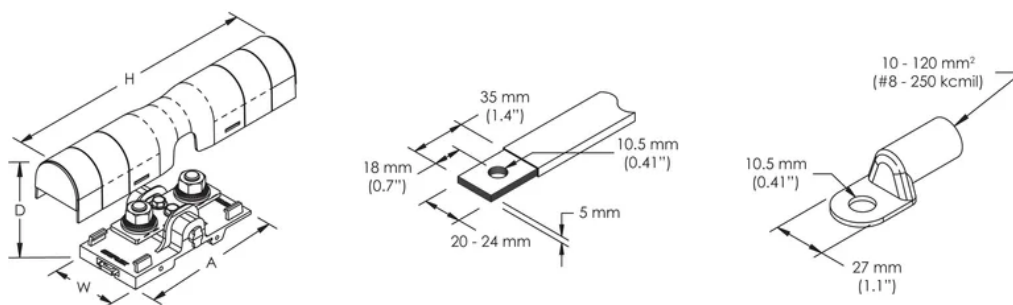

VARNING

nVent produkter ska installeras och användas endast så som anges i nVents bruksanvisning och utbildningsmaterial. Bruksanvisningar är tillgängliga på www.nvent.com och från din nVent kundtjänstrepresentant. Felaktig installation, missbruk, felapplicering eller annan brist i att helt följa nVents instruktioner och varningar kan orsaka att produkten brister, egendomsskador, allvarliga kroppsskador och dödsfall och/eller ogiltigförklara din garanti.



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER