



INSERTER/EXTRACTOR HANDLE TYPE IET, GREY LEVER, BLACK BUTTON, BOTTOM, 10 PIECE


CATALOG NUMBER

20817-714



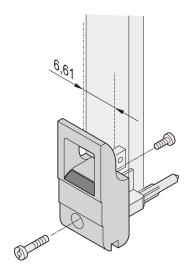



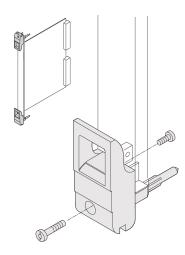

The inserter/extractor handle, type IET in accordance with IEEE 1101.10. 0,1" offset. Two of these handles can overcome a single lever force of 700 N (per pair).

CERTIFICATIONS



FEATURES

Suitable for insertion and extraction forces up to 700 N (per pair)

In accordance with IEEE 1101.10 and IEC 60297-3-102

A microswitch can be mounted

0.1" offset is used for PSUs with SMD Plus

PRODUCT ATTRIBUTES

Product Type: Handle

Type: Inserter/Extractor, 0.1" Offset

Works With: Front Panels

Handle Type: IET

Material: Polycarbonate

Color: Grey

Flammability Rating: UL® 94V-0


Complies With: EN 45545-2

Package Quantity: 10

ADDITIONAL PRODUCT DETAILS

Please order Coding pegs and Microswitch separately.

DIAGRAMS

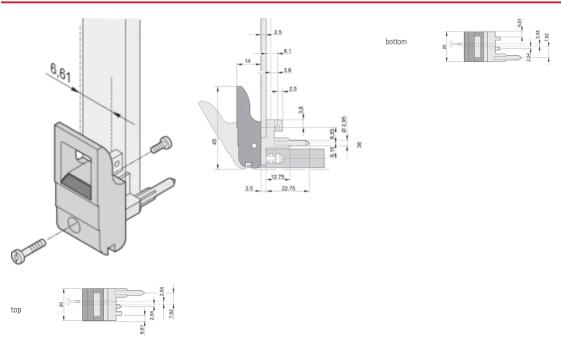

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

All locations +1.763.422.2661 Chat with us: schroff.nvent.com

Europe Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: schroff.nvent.com

Asia

Shanghai, China +86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: schroff.nvent.com



Our powerful portfolio of brands:

CADDY ERICO **HOFFMAN RAYCHEM SCHROFF**

nVent.com **TRACER**

3