

TD COMPACT FOUR POLE DISTRIBUTION BLOCK, 40 A



CERTIFICATIONS



VLASTNOSTI

Minimum space for maximum power

Protection cover and insulating screens are transparent

Insulating screen between each row

Easy and safe connections

Easily clips onto DIN rail or mounts to panel with screws

Solid bars provide reliability

Wiring with or without terminal

RoHS compliant

Conforms to EN 45545 obtaining an HL3 classification for chapter R23 and HL2 classification for chapter R22

Halogen free

SPECIFIKACE

Table 1/4

Katalogové číslo	Article Number	Max Current Rating, IEC	Peak Short Circuit Current (I _{pk})	Line Side Stranded Wire Size - Ferrule	Line Side Compact Stranded Wire Size	Materiál
TD-40A	563740	40A	22kA	4 – 10mm ²	6 - 16 mm ²	Thermoplastic, Brass

Table 2/4

Katalogové číslo	Article Number	Short Term Withstand Current (I _{cw}) 1s	Line Side Number of Connections	Load Side Number of Connections	Load Side Compact Stranded Wire Size	Load Side Stranded Wire Size - Ferrule
TD-40A	563740	4.5kA	2	11	(11) 1,5 - 4 mm ²	(11) 0,75 – 4 mm ²

Table 3/4

Katalogové číslo	Article Number	Max Working Voltage, IEC (U _i)	Height (H)	Width (W)	Hloubka (D)	Unit Weight
TD-40A	563740	500	90mm	100mm	50mm	0.33kg


Table 4/4

Katalogové číslo	Article Number	Flammability Rating	Complies With
TD-40A	563740	UL® 94V-0	IEC® 60947-7-1

ADDITIONAL PRODUCT DETAILS

Line side and load side number of connections are per pole.

Design Guideline for Distribution Blocks, Power Blocks and Power Terminals										
Derating according to Ambient* Temperature (°C) to maintain working temperature of 85°C										
Ambient Temperature (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
Derating Coefficient (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*environment around the terminal blocks inside the enclosure										

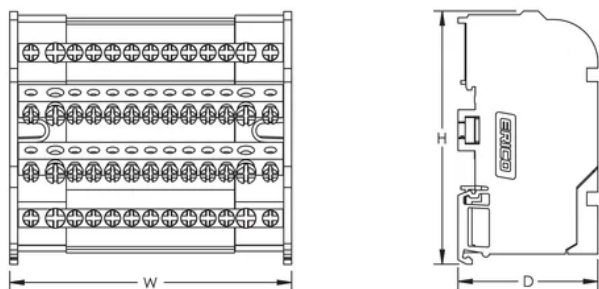

UPOZORNĚNÍ

Produkty nVent musí být instalovány a používány pouze tak, jak je uvedeno v instrukčních listech a materiálech pro školení nVent. Instrukční listy jsou k dispozici na www.nvent.com a od vašeho zástupce zákaznického servisu nVent. Nesprávná instalace, zneužití, nesprávné použití nebo jiný nedostatek úplného dodržování pokynů a varování nVent může způsobit selhání produktu, poškození majetku, vážné zranění osob a smrt a/nebo zrušit vaši záruku.



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER