

SBLT-350 LUG-TO-TUNNEL POWER TERMINAL



CERTIFICATIONS



KENMERKEN

Tinned copper block allows for copper or aluminum conductor connections

Accessible studs and tunnels allow for easy connection of nVent ERIFLEX Flexibar and other conductors

Design allows for visual inspection of conductor and confirmation of connection

Adjustable transparent cover

Modular snap-together blocks for building multi-pole power blocks

Easily clips onto DIN rail or mounts to panel with screws

SBLEC Power Terminals Fixing Accessory required for direct panel mount

RoHS compliant

Halogen free

SPECIFICATIES

Table 1/5

Catalogusnummer	Article Number	Afwerking	Max Current Rating, IEC	Max Current Rating, UL/CSA	Kortsluitstroomwaarde (SCCR)	Peak Short Circuit Current (I _{pk})
SBLT-350	561142	Tinned	500A	310A	100kA	43kA

Table 2/5

Catalogusnummer	Article Number	Materiaal	Number of Stud Connections	Stud Connection Conductor Width	Short Term Withstand Current (I _{cw}) 1s	Stud Connection Wire Size
SBLT-350	561142	Copper, Thermoplastic	1	20 – 24 mm	22.2kA	#2 - 350 kcmil

Table 3/5

Catalogusnummer	Article Number	Stud Connection Compact Stranded Wire Size	Number of Tunnel Connections	Max Working Voltage, IEC (U _i)	Max Working Voltage, UL (V _{in})	Tunnel Connection Wire Size - Ferrule
SBLT-350	561142	10 – 185 mm ²	1	1000, 1500	1000	35 – 150 mm ²

Table 4/5

Catalogusnummer	Article Number	Tunnel Connection Compact Stranded Wire Size	Tunnel Connection Wire Size	Hoogte (H)	Breedte (W)	Diepte (D)
SBLT-350	561142	35 – 185 mm ²	#2 – 350 kcmil	205.7mm	52.3mm	65mm

Table 5/5

Catalogusnummer	Article Number	A	Eenheid gewicht (metrisch)	Flammability Rating	Certification Details	Conform
SBLT-350	561142	108mm	0.35kg	UL® 94V-1	UL® 1059	IEC® 60947-7-1

ADDITIONAL PRODUCT DETAILS

Power terminal connections are interchangeable and can be used as line side or load side connections.


Design Guideline for Distribution Blocks, Power Blocks and Power Terminals

Derating according to Ambient* Temperature (°C) to maintain working temperature of 85°C

Ambient Temperature (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
Derating Coefficient (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47

*environment around the terminal blocks inside the enclosure

DIAGRAMS

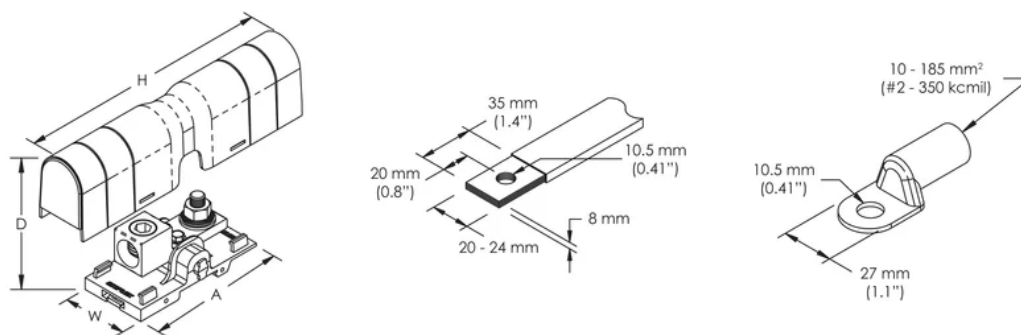

WAARSCHUWING

nVent-producten moeten alleen worden geïnstalleerd en gebruikt zoals aangegeven in de instructiebladen en trainingsmateriaal van nVent. Instructiebladen zijn beschikbaar op www.nvent.com en bij uw nVent klantenservicevertegenwoordiger. Onjuiste installatie, misbruik, verkeerde toepassing of ander falen om de instructies en waarschuwingen van nVent volledig te volgen, kan leiden tot productstoringen, schade aan eigendommen, ernstig lichamelijk letsel en de dood en/of uw garantie ongeldig maken.



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER