

SBLT-800 LUG-TO-TUNNEL POWER TERMINAL



CERTIFICATIONS



CARACTERÍSTICAS

Tinned copper block allows for copper or aluminum conductor connections

Accessible studs and tunnels allow for easy connection of nVent ERIFLEX Flexibar and other conductors

Design allows for visual inspection of conductor and confirmation of connection

Voltage detection and measurement connection

Adjustable transparent cover

Modular snap-together blocks for building multi-pole power blocks

Easily clips onto DIN rail or mounts to panel with screws

SBLEC Power Terminals Fixing Accessory required for direct panel mount

RoHS compliant

Halogen free

ESPECIFICAÇÕES

Table 1/5						
Número de catálogo	Article Number	Acabamento	Max Current Rating, IEC	Max Current Rating, UL/CSA	Classificação de corrente de curto-circuito (SCCR)	Peak Short Circuit Current (I _{pk})
SBLT-800	561146	Tinned	1250A	760A	100kA	75kA

Table 2/5						
Número de catálogo	Article Number	Material	Number of Stud Connections	Stud Connection Conductor Width	Short Term Withstand Current (I _{cw}) 1s	Stud Connection Wire Size
SBLT-800	561146	Copper, Thermoplastic	2	(2) 20 – 40 mm, (1) 50 – 80 mm	57.6kA	(2) #1 - 500 kcmil

Table 3/5						
Número de catálogo	Article Number	Stud Connection Compact Stranded Wire Size	Number of Tunnel Connections	Max Working Voltage, IEC (U _i)	Max Working Voltage, UL (V _{in})	Tunnel Connection Wire Size - Ferrule
SBLT-800	561146	(2) 35 – 300 mm ²	2	1000, 1500	1000	(2) 50 – 185 mm ²

Table 4/5						
Número de catálogo	Article Number	Tunnel Connection Compact Stranded Wire Size	Tunnel Connection Wire Size	Altura (H)	Largura (W)	Profundidad e (D)
SBLT-800	561146	(2) 95 – 240 mm ²	(2) 3/0 – 500 kcmil	205.7mm	115mm	75mm


Table 5/5						
Número de catálogo	Article Number	A	Peso unitário	Flammability Rating	Certification Details	Em conformidad e com
SBLT-800	561146	108mm	1.09kg	UL® 94V-1	UL® 1059	IEC® 60947-7-1

ADDITIONAL PRODUCT DETAILS

Power terminal connections are interchangeable and can be used as line side or load side connections.

Design Guideline for Distribution Blocks, Power Blocks and Power Terminals										
Derating according to Ambient* Temperature (°C) to maintain working temperature of 85°C										
Ambient Temperature (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
Derating Coefficient (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*environment around the terminal blocks inside the enclosure										

DIAGRAMS

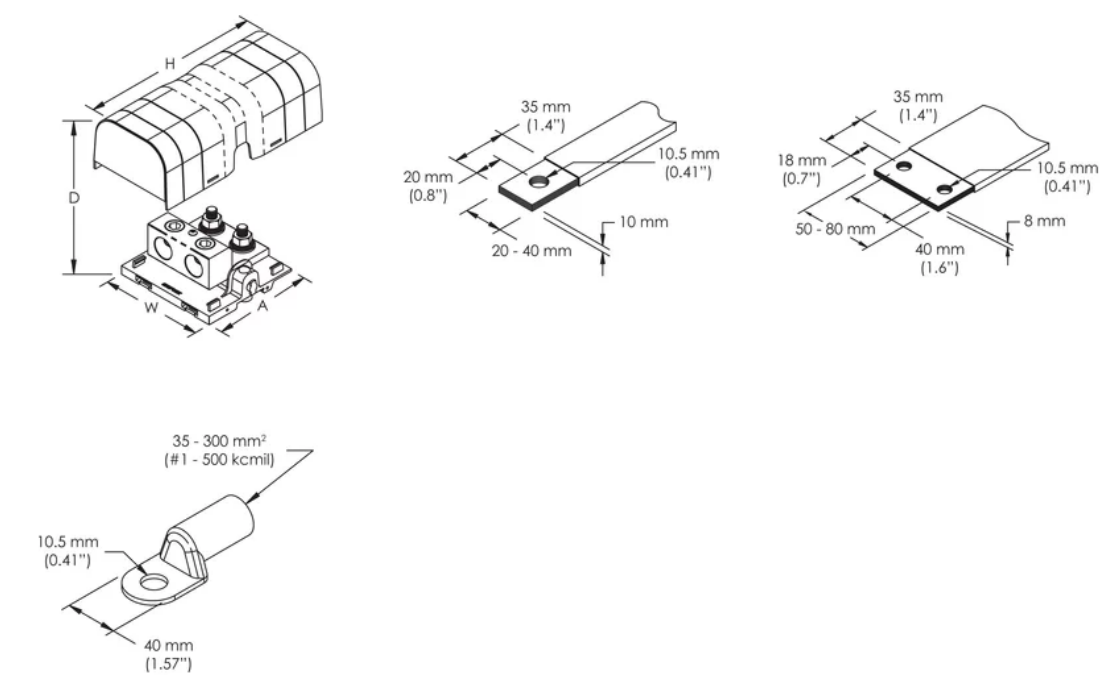

AVISO

Os produtos nVent devem ser instalados e utilizados apenas conforme indicado nas fichas de instrução do produto e materiais de treinamento da nVent. As fichas de instrução estão disponíveis em www.nVent.com e com nossos representantes de atendimento ao cliente nVent. A instalação inadequada, uso incorreto, aplicação incorreta ou outra falha qualquer em seguir completamente as instruções e avisos da nVent podem levar ao mau funcionamento do produto, danos à propriedade, lesões corporais graves e morte, e/ou anular sua garantia.



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER