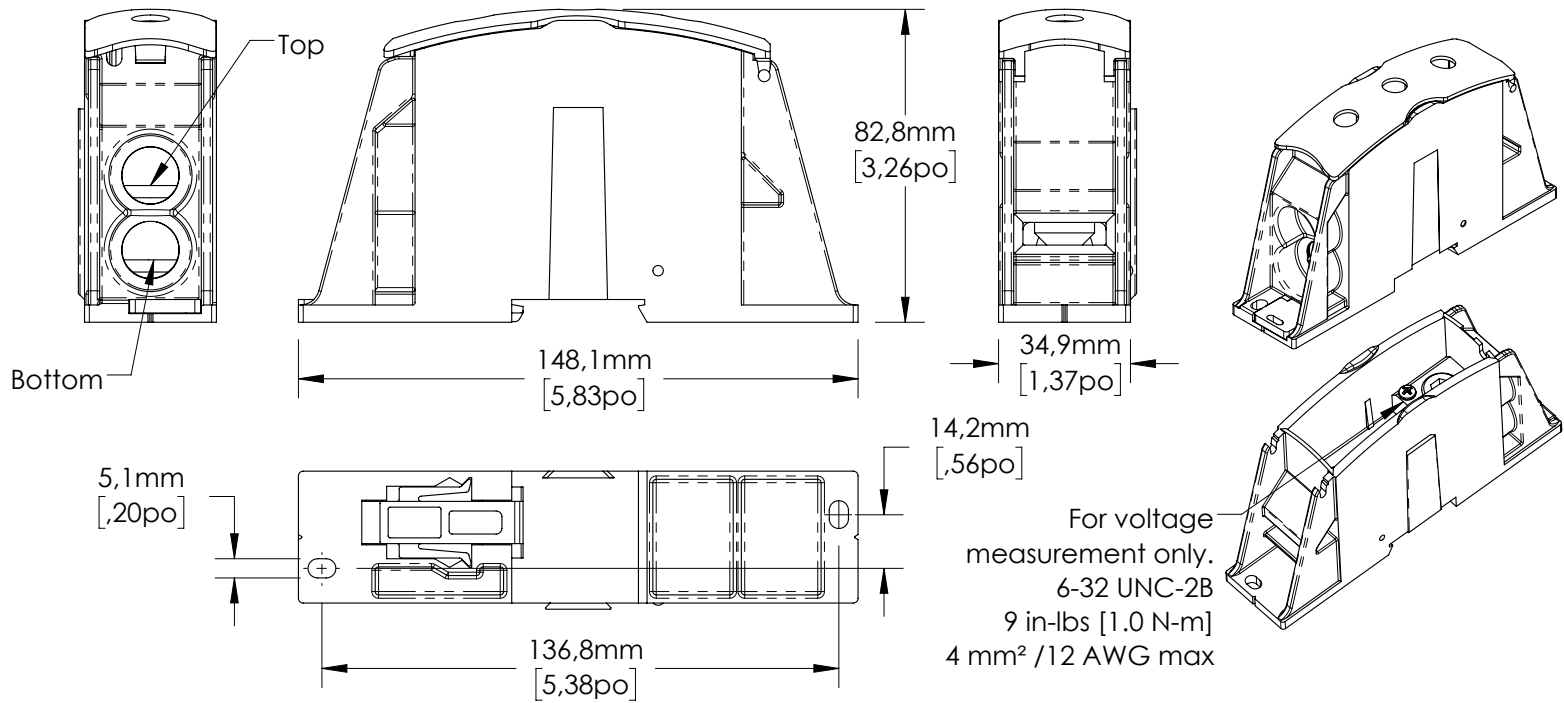






SBF2C250  
561172



IEC 60947-7-1							
	No. Terminals	Conductor	Size	Ø DIA	Torque	Strip Length	Hex
	1	ERIFLEX FLEXIBAR [ERIFLEX IBSB]	2X20X1 to 5X20X1 [50 to 70 mm²] Hole size 8.5mm	N/A	31.1 N-m	29.5 mm	8 mm
	1 (Top)	 	35 mm² to 120 mm²	15.1 mm		29.5 mm	
	1 (Bottom)					55.3 mm	

UL 1953							
	No. Terminals	Conductor	Size	Ø DIA	Torque	Strip Length	Hex
	1	ERIFLEX FLEXIBAR [ERIFLEX IBSB]	2X20X1 to 5X20X1 [50 to 70 mm²] Hole size 8.5mm	N/A	275 in-lbs	1.16 in	5/16 in
	1 (Top)		6 AWG to 250 kcmil	0.594		1.16 in	
	1 (Bottom)	High Strand, DLO*				2.18 in	

The IBSB conductor must be pushed as far as possible into the housing

- NOTE:
- 1. \*Refer to UL file E198301 for conditions of acceptance.
  - 2. For multiple phase assemblies, join blocks together before installing DIN profile.
  - 3. When mounted on DIN profile, end stops should be used on both ends of gangable blocks.
  - 4. For IEC, the cable must be secured within 15cm of the terminal.

- WARNING:
- 1. nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at [www.nVent.com](http://www.nVent.com) and from your nVent customer service representative.
  - 2. nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
  - 3. All instructions must be completely followed to ensure proper and safe installation and performance.
  - 4. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.

SAFETY INSTRUCTIONS:  
All governing codes and regulations and those required by the job site must be observed.  
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.  
nVent, nVent CADDY, nVent ERICO, nVent GARDNER BENDER, nVent ILSCO, nVent KING INNOVATION, and nVent LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.