

2 HOLE LUG



功能

Provides an efficient bolting surface for grounding and power applications

Electrolytic grade copper

For use with nVent ERICO Cadweld type LA connections only

技术参数

材料: Copper

类型: NEMA®

表面处理: Tinned

Table 1/2

物料号	宽度 (W)	厚度 (T)	长度 (L)	B	A	孔尺寸 (HS)
B102CE	25.4mm	3.18mm	101.6mm	44.45mm	15.9mm	14.29mm
B103CE002	25.4mm	3.18mm	88.9mm	44.45mm	15.9mm	11.11mm
B102DE	25.4mm	4.76mm	101.6mm	44.45mm	15.9mm	14.29mm
B102EE	25.4mm	6.35mm	104.78mm	44.45mm	15.9mm	14.29mm
B102EG	38.1mm	6.35mm	104.78mm	44.45mm	15.9mm	14.29mm
B102EH	50.8mm	6.35mm	104.78mm	44.45mm	15.9mm	14.29mm
B102EH001	50.8mm	6.35mm	152.4mm	44.45mm	15.9mm	14.29mm


物料号	宽度 (W)	厚度 (T)	长度 (L)	B	A	孔尺寸 (HS)
B103EK004	76.2mm	6.35mm	76.2mm	44.45mm	25.4mm	14.29mm
B102GG	38.1mm	9.53mm	120.65mm	44.45mm	15.9mm	14.29mm
B102GH	50.8mm	9.53mm	120.65mm	44.45mm	15.9mm	14.29mm
B102JH	50.8mm	12.7mm	133.35mm	44.45mm	15.9mm	14.29mm

Table 2/2	
物料号	等效导体尺寸
B102CE	80.63mm ²
B103CE002	80.63mm ²
B102DE	120.94mm ²
B102EE	161.26mm ²
B102EG	242mm ²
B102EH	322.51mm ²
B102EH001	322.51mm ²
B103EK004	483.77mm ²
B102GG	362.83mm ²
B102GH	483.77mm ²
B102JH	645.03mm ²

ADDITIONAL PRODUCT DETAILS

For sizes not listed, contact us.

DIAGRAMS

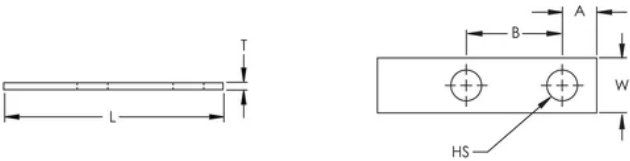

警告

应仅根据 nVent 的产品说明书与培训材料安装并使用 nVent 的产品。可访问 www.nvent.com 获取说明书，或者向您的 nVent 客服代表索取。错误安装、使用不当、滥用或未能完全遵守 nVent 的说明与警告，可能会造成产品故障、财产损失、严重的人身伤害及死亡和/或使得保修服务无效。



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© 2025 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.