

FOUR POLE DISTRIBUTION BLOCK, 40 A, 2 LINE SIDE & 11 LOAD SIDE CONNECTIONS

目录编号

TD-40A



CERTIFICATIONS



功能

Minimum space for maximum power

Protection cover and insulating screens are transparent

Insulating screen between each row

Easy and safe connections

Easily clips onto DIN rail or mounts to panel with screws

Solid bars provide reliability

Wiring with or without terminal

RoHS compliant

Conforms to EN 45545 obtaining an HL3 classification for chapter R23 and HL2 classification for chapter R22

Halogen free

产品属性


| |
|---|
| Article Number: 563740 |
| Material: Thermoplastic; Brass |
| Max Current Rating, IEC: 40A |
| Short Term Withstand Current (Icw) 1s: 4.5kA |
| Peak Short Circuit Current (Ipk): 22kA |
| Max Working Voltage, IEC (Ui): 500 |
| Line Side Number of Connections: 2 |
| Line Side Compact Stranded Wire Size: 6 - 16 mm ² |
| Line Side Stranded Wire Size - Ferrule: 4 – 10mm ² |
| Load Side Number of Connections: 11 |
| Load Side Compact Stranded Wire Size: (11) 1,5 - 4 mm ² |
| Load Side Stranded Wire Size - Ferrule: (11) 0,75 – 4 mm ² |
| Depth (D): 50mm |
| Height (H): 90mm |
| Width (W): 100mm |
| Unit Weight: 0.33kg |
| Flammability Rating: UL® 94V-0 |
| Complies With: IEC® 60947-7-1 |

ADDITIONAL PRODUCT DETAILS

Line side and load side number of connections are per pole.

| | | | | | | | | | | |
|-------------------------------|-----|-----|-----|------|------|------|------|------|------|------|
| 分线盒、接线盒和接线端子的设计指南 | | | | | | | | | | |
| 根据环境*温度 (°C) 降容以保持 85°C 的工作温度 | | | | | | | | | | |
| 环境温度 (°C) | 30° | 35° | 40° | 45° | 50° | 55° | 60° | 65° | 70° | 75° |
| 降容系数 (d) | 1 | 1 | 1 | 0.94 | 0.88 | 0.82 | 0.75 | 0.67 | 0.58 | 0.47 |
| *柜子内端子排周围的环境 | | | | | | | | | | |

DIAGRAMS

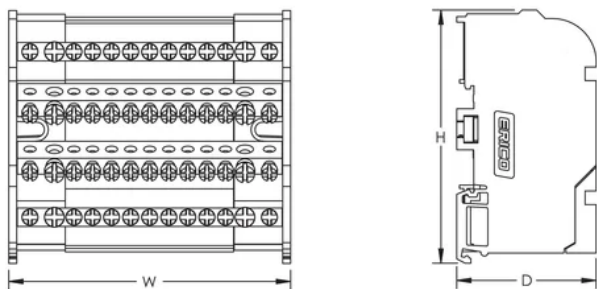

警告

应仅根据 nVent 的产品说明书与培训材料安装并使用 nVent 的产品。可访问 www.nvent.com 获取说明书，或者向您的 nVent 客服代表索取。错误安装、使用不当、滥用或未能完全遵守 nVent 的说明与警告，可能会造成产品故障、财产损失、严重的人身伤害及死亡和/或使得保修服务无效。



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

© 2025 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.