

CONDUCTOR SADDLE



FEATURES

Secures lightning protection conductors and prevents displacement

Mechanically secured with Pozidriv screws or nails

Fix using countersunk M6 screw and wall plug

SPECIFICATIONS

Material: Leaded Gunmetal


Table 1/2

Catalog Number	Conductor Size	Complies With	Length (L)	Thread Length (TL)	Width (W)	Height (H)
CCS050	50 mm ² Stranded	IEC® 62561-4	55 mm	12mm	20 mm	17.5 mm
CCS070	70 mm ² Stranded	IEC® 62561-4	55 mm	12mm	20 mm	18.5 mm
CCS095	95 mm ² Stranded	IEC® 62561-4	55 mm	12mm	20 mm	19.5 mm

Table 2/2

Catalog Number	Hole Size (HS)	Thread Size (TS)	Unit Weight
CCS050	6.6 mm	M6	0.1 kg
CCS070	6.6 mm	M6	0.1 kg
CCS095	6.6 mm	M6	0.1 kg

DIAGRAMS

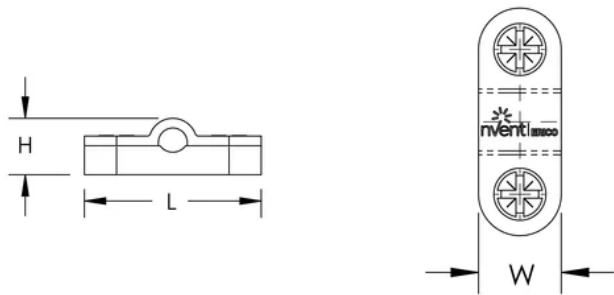

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER