


CABS BUSBAR SUPPORT KIT



CERTIFICATIONS



FEATURES

For all busbar types

Improve bending resistance by interlocking or stacking two profiles

Quick and easy to install

Halogen free insulators

RoHS compliant

SPECIFICATIONS

Table 1/3

Catalogusnummer	Artikelnummer	Typical Application Current Rating	Busbars per Phase	Busbar Thickness	Breedte rail	Max Working Voltage, IEC (Ui)
CABS4-5TN-400	549310	400 – 4,500 A	1 – 4	5 mm	30 – 125 mm	1,000 VAC, 1,500 VDC


Table 2/3

Catalogusnummer	Artikelnummer	Werktemperatuur	C	B	Breedte (B)	A
CABS4-5TN-400	549310	-40 to 130 °C	325 mm	75 mm	350 mm	300 mm

Table 3/3

Catalogusnummer	Artikelnummer	Gewicht
CABS4-5TN-400	549310	0.800 kg

DIAGRAMS

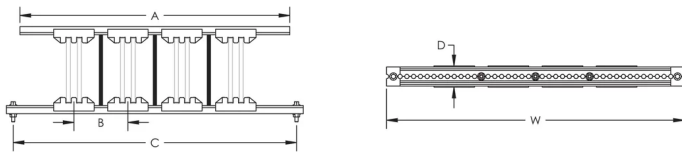

WAARSCHUWING

Producten van nVent moeten worden geïnstalleerd en gebruikt op de manier zoals is aangegeven in de nVent productinformatiebladen en trainingsmaterialen. U kunt de productinformatiebladen downloaden van www.nvent.com of opvragen bij uw nVent-klantenservice. Door onjuist installeren, verkeerd gebruik, verkeerde toepassing of enige andere handeling in strijd met de instructies en waarschuwingen van nVent kan het product mogelijk niet correct werken, ernstig of fataal letsel en materiële schade veroorzaken en/of uw garantie ongeldig maken.



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER